



EU Type Examination Certificate

Date: 2023/03/07

n. **189231001/OE**

Validity: 2028/03/06

The hereunder described items of Personal Protective Equipment have overcome positively the "EU type examination" (Module B), proving their conformity to the safety and health requirements of the Regulation (EU) 2016/425 (Annex II)

Manufacturer: (Responsible of the PPE)	PANDA SPORT s.r.l. Contrada Colucci, 154 – 72014 CISTERNINO (BR) – ITALIA	
Type of PPE:	Safety footwear in conformity with EN ISO 20345:2022 class I (= footwear made from leather and other materials)	
Category of PPE:	II : "medium" risks. This certificate is based on reference standards listed below: its validity is no longer ensured should new version of the standards come into force.	
Model	"6611N S1P FO SR LAMBDA NEOS S1P"	
Description:	 <u>model</u>: A (low footwear); <u>fastening system</u>: by means of laces; <u>processing</u>: direct injection; <u>outsole</u>: orange compact PU marked antistatic oil resistant made in Italy shock absorber (POL6011); <u>midsole</u>: black foam PU (POL1001-POL1002); <u>upper</u>: grey suede leather CROSTA SCAMOSCIATA declared thickness 1,6-1,8 mm partially perforated (PEL0100170); <u>collar</u>: black coated fabric ALFA LISCIO (MTO2010090) matched with foam material and silver synthetic material CARBON declared thickness 1,6 mm (MTO4080071); <u>tongue/bellows</u>: black coated fabric ALFA LISCIO (MTO2010090), centrally lined and padded; <u>vamp lining</u>: dark grey felt PUNTA ECO (MRI305); <u>quarter lining</u>: orange mesh fabric AIRNET (MFO2010011); <u>heel-grip</u>: anthracite grey non-woven fabric AGOTEX 9/10 (MRI301); <u>insole</u>: grey felt declared thickness 2,5 mm STD (SSOP10); <u>penetration resistant insert</u>: varnished steel, article "785 SAFIT" (LAM11025); <u>heel seat lining</u>: grey felt matched with grey non-woven material on the foot side "SIDAC 239/17P antistatic 600g" (SSOF11); <u>toecap</u>: steel, article "443 SAFIT" (PUN11005).	
Technical Standard:	EN ISO 20344:2021 EN ISO 20345:2022	Personal protective equipment – Test methods for footwear Personal protective equipment – Safety footwear
Intended use:	general industry, engineering industry, construction industry, agriculture, warehouses, works on trucks, cranes.	
Size range:	from 36 to 48	
Technical File:	DC-15931	
Test report:	RCT n°4230903/E	





EU Type Examination Certificate

Date: 2023/03/07

n. **189231001/OE**

Validity: 2028/03/06

Functions and
performance levels:

basic requirements for safety footwear (SB) (see Table 2 and 3 of EN ISO 20345:2022): all mandatory ones, among which:

Slip resistance = slip resistance on ceramic tile floor with NaLS.

Additional requirements (Tab. 16 and 20 of EN ISO 20345:2022):


S1 = closed heel area, energy absorption of seat region, antistatic properties; **P** = perforation resistance; **FO** = resistance to fuel oil; **SR^(*)** = slip resistance on ceramic tile floor with glycerine.

Note: ^(*) the final level of the anti-slip features is achieved after the first hours of trial stage.

Marking:

on a stitched label and displaying the following information:

- **CE Marking**;
- Name/Trademark of the Manufacturer + complete address;
- designation of the footwear (alphanumeric code);
- nr. and year of the Standard of reference + safety symbols;
- size of footwear (printed onto the outsole);
- date of production.

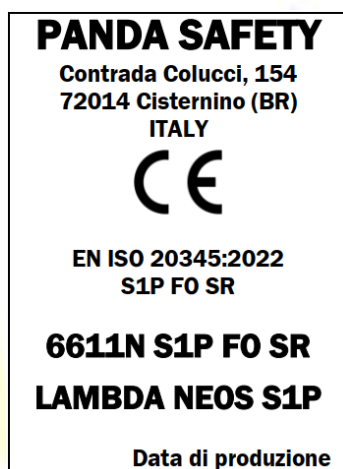

NOTE: the Technical File contains a more detailed description of the PPE (material, method of assembly, photographs or drawings), performance data, safety functions and level of protection, elements of conformity to the basic and supplementary requirements. The Technical File is integral part of the present Certification, which has to be kept available by the applicant to be forwarded - upon request - to the entitled person (supervising body, Controlling Officer).

